


## LED Flat Recessed Light Enclosure

The new e.z. barrier enclosure for in-wall speakers /LED flat recessed lights are easy to install, reducing unnecessary labor and material costs while diminishing the transfer of sound from one room to another. It also maintains the integrity of a one-hour Fire-rated wall / ceiling.

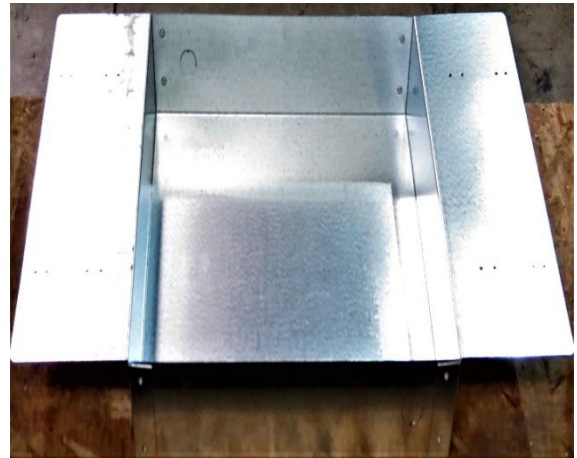

**Ceiling LED Flat  
rated wall or ceiling enclosure.  
Model: ezb14-14-3**

It allows residential and commercial contractors to meet building code requirements for installation in walls or ceiling assemblies. With the new e.z. barrier one-hour fire-rated enclosure, you will install speakers or Flat LED Lighting in a fraction of the time while maintaining the National fire codes.

When it comes to one-hour fire-rated enclosures, count on e.z. barrier solutions from the fire-rated enclosure experts.

### **We make it easy for you:**

- Ez to install.**
- Ez to save money.**
- Ez to meet the fire code.**


## Product Features for Model # ezb14-14-3

- Fits both 16" and 24" on-center applications; one size fits most fire-rated walls or ceilings,
- Attaches quickly with drywall screws, saving time and labor,
- Features 4 knock-outs for wiring flexibility with easy access from any direction,
- Protects in-wall speakers or ceiling flat LED lighting from harmful moisture and dirt,
- Keeps loose insulation out of eyes while installing speakers or LED flat downlights,
- Maintains vapor barrier integrity to meet new "tight building" codes,
- Maintenance free,
- Affixed directly to the structure

## Meets National One-Hour Fire-Rating Codes

**Confines fire, gas, smoke and heat within the enclosure for 60 minutes. Meets the following National Fire Codes:**

- **ASTM E-119-05a**
- **UL 263**
- **UBC 7-1**
- **NFPA 251**
- **ANSI A2.1**
- **ULC S101**

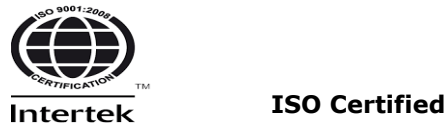

## SPECIFICATIONS

- **Flange 5" wide for easy mounting,**
- **Material: Corrosion-resistant metal**
- **Internal Dimensions: 13.5"long x 13.5"wide x 3"deep.**